

Multi-outlet Strip Surge/RFI Protectors

PARASURGE MULTIPRO and MULTIMEDIA



Parasurge MultiPro F

6-outlet strip built in with surge protection circuit for AC network. It is based on gas tube and varistors hybrid association, with thermal safety to comply IEC 61643-1 standard.

It is equipped with switch and light indicators for surge protection status (active or disconnected) and AC voltage status (voltage on/voltage off). Moreover, this unit is featured with a RFI filter to protect against HF disturbances.

The specific shape of the strip allows an easy cord management.

Parasurge MultiMedia F

6-outlet strip, similar to Parasurge MultiPro F, but with extra surge protection circuits for telecom line (PSTN or ADSL) and TV connection. This unit is connected by its cord on the wall AC outlet and the telecom line and TV is connected on the connectors of the Parasurge MultiMedia F.


This surge protector is especially dedicated to computer/video system equipped with modem and TV connection.

Parasurge MultiMedia F/MS


Version built-in with an «Master/Slave» feature : Automatic switch on/off of all the devices connected to the Parasurge in relation with the status of the device connected on the «Master» outlet. That allows an easy and safe control of the PC or Home Cinema system.

- «Multi-outlet strip» Surge Protectors
- «MultiMedia» version :
 - Telecom/TV protectors
 - Protection and AC voltage status indicators
 - General switch
 - Complies with IEC 61643-1
 - «Master/Slave» option


Dimensions (in mm)

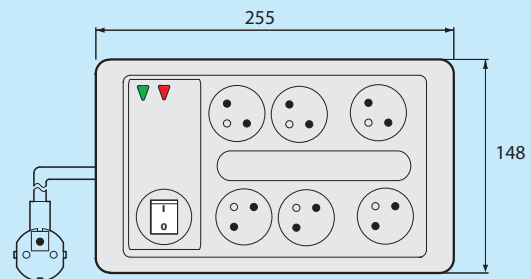

PARASURGE MULTIPRO F

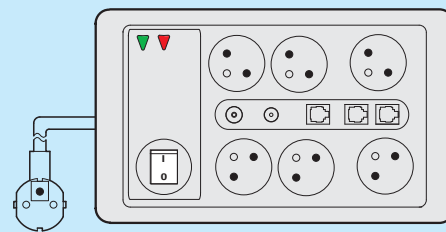

PARASURGE MULTIMEDIA F



Characteristics

| Product type | Surge/RFI protector 6-outlet strip | |
|------------------------------------|------------------------------------|------------------------|
| Nominal voltage | 230 V single phase | |
| Max. operating voltage (Uc) | 250 Vac | |
| Maximum line current | 16 A | |
| Protection level (Up) | 1.5 kV | |
| Max. discharge current (Imax) | 5 kA (1 x 8/20µs) | |
| Nominal discharge current (In) | 2.5 kA (15 x 8/20µs) | |
| Safety disconnection | Disconnection by internal fuse | |
| AC voltage on | Light switch on | |
| Surge protection active | Green light on | |
| Compliance | IEC 61643-1 | |
| Fonctionnalités | Parasurge MultiPro F | Parasurge MultiMedia F |
| 6 protected outlets | yes | yes |
| General switch | yes | yes |
| AC surge protection | yes | yes |
| RFI filter | yes | yes |
| Telecom (or ADSL) surge protection | no | yes |
| TV surge protection | no | yes |